MODEL: CF 9392-A 6'


Parts List		
Parts	Description	Qty
1	Headboard	1
2	Footboard	1
3	Side Rail Side Rail	2
4	Side Rail Legs Wooden 70 x 70 x 50(H)	2
5	Metal Centre Rail 2000mm	1
6	Wooden Centre Rail 1450mm	2
7	Support Leg 65mm	4
8	Pump Mounting Bracket	2


Parts	Description	Qty
9	Bracket Base	2
10	Gas Spring	2
11	Wooden Frame Bracket	2
12	Wooden Frame (holes are not the same)	1
13	Wooden Frame (holes are not the same)	1
14	Bottom Panel	3
15	Side Wing	2
16	Drawer Legs Wooden 35 x 45 x 50(H)	2
17	Footboard Drawer	1

Hardware List			
Parts	Description		Qty
А	M6 x 30 mm JCBC		8
В	M6 x 40 mm JCBC		18
С	M6 x 50 mm JCBC		6
D	M8 x 60 mm JCBC		8
E	M6 Spring Washer	©	16
F	M6 Flat Washer		26
G	M8 Spring Washer	©	16
Н	M8 Flat Washer		16


Parts	Description		Qty
I	M8 Hex Nut		8
J	M4 x 25 mm CSK	<u>()</u>	20
K	Allen Key M4 x 100 mm		1
L	Allen Key M5 x 70 mm		1
М	M8 Spanner	S)	1
N	Small Adjuster	<u>_</u>	4
0	M8 x 20 mm JCBB		4
Р	M4 x 32 mm CSK	©	2


Step 1 : Attach the pump mounting bracket (8) and bracket base (9) to the both side rail (3) using hardware parts B , E , F and K. Attach the legs (4) to the footboard (3) using hardware parts (C) and (K).

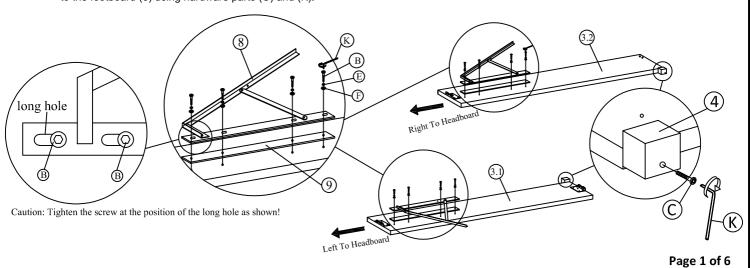


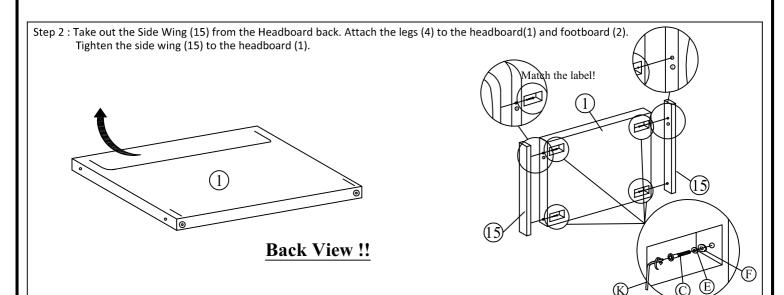


Step 3: Attach the Drawer Leg (16) to the bottom Footboard Drawer (17).

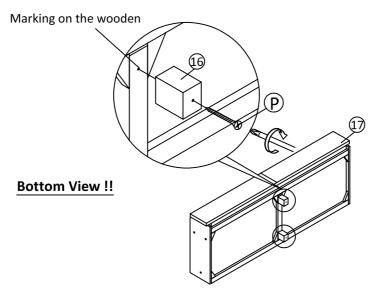




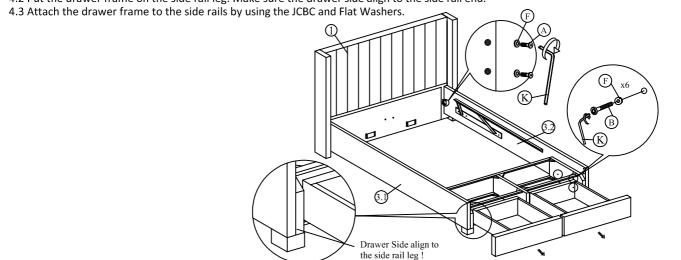


Step 5 : Attach the footboard (2) to side rails (3) by pushing the brackets down into place and secure the bolts using hardware part L as shown.

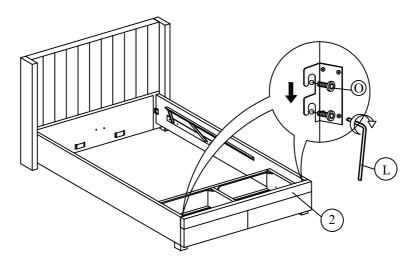


Step 6: Attach the support legs (7) to the centre rail (6) using hardware parts B and K.

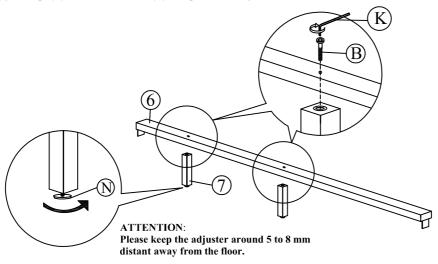


Step 7: Insert the centre rail (6) to the headboard (1) and footboard (2).




Step 8: Insert the bottom panel (14) to the below frame and secure using hardware part J and a screwdriver (not provided).

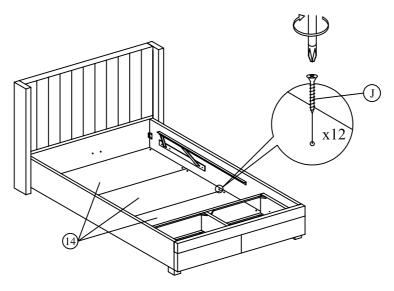


Step 9: Insert the centre rail (5) to the headend (1) and footend (2) and secure using hardware part A and K.

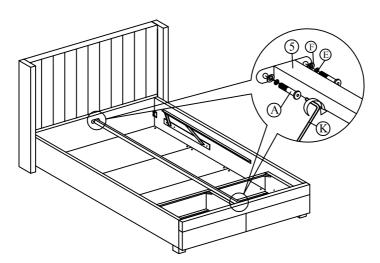


Step 10: Unscrew the Pre-attached hex-nut of gas spring (10) and attach it back again as shown. Please fully tighten the nut.

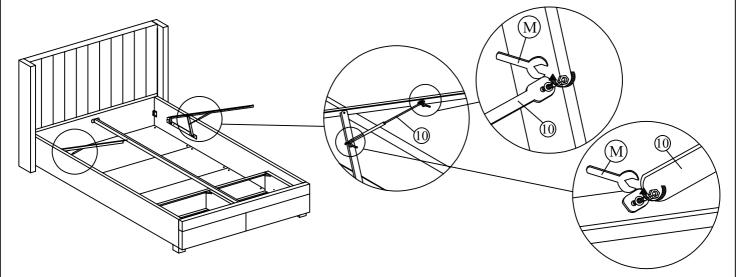


Step 11: Must place the wooden frame (12 & 13) in correct position (please follow the position as shown in diagram).

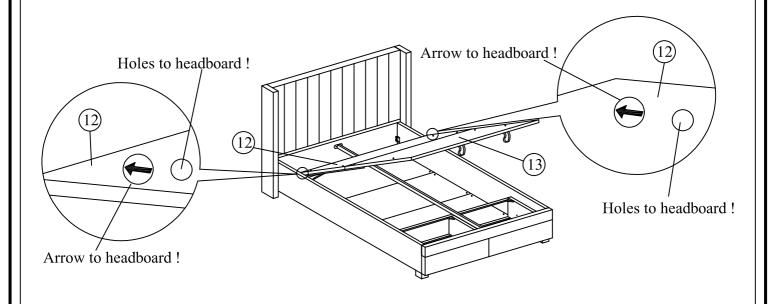

Step 12 : Assembly the wooden frame (12) and wooden frame (13) to the bracket and tighten all the fitting accordingly.

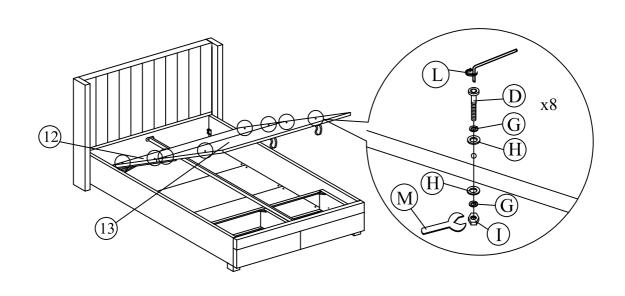

Step 13: ttach the wooden frame bracket (11) to the wooden frame using hardware parts J and a screwdriver (not provided).

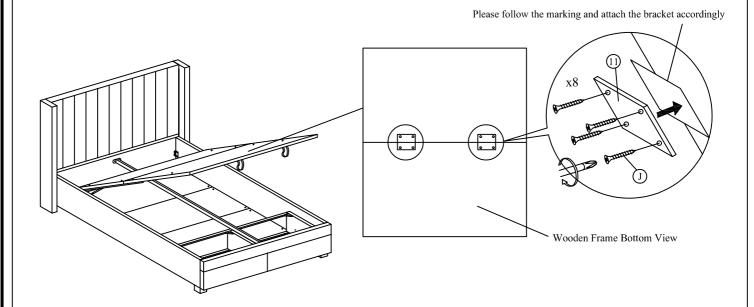

Step 14 : Please use the safety lock for safety purpose.

